


2SPC/3SPC SERIES

2inch/3inch plastic impeller BLDC Solar Submersible Pumps

Model Instruction

3SPC3.6/26-D24/400

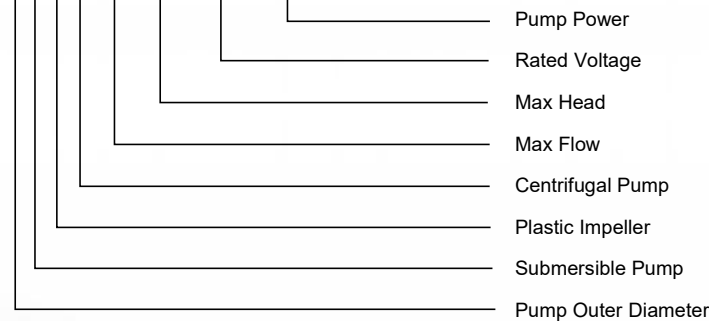

Material of Parts

- Outlet: Brass
- Pump/Motor Body: Stainless Steel
- Impeller: Plastic
- Screw: 304 Stainless Steel
- Motor: Permanent Magnet Synchronous DC Motor
- Controller: MPPT/32bit MCU/FOC/Sine Wave Current



Performance Chart

Model	Head (Mtrs.)	10	20	30	40	50	65	85	100	110	125	140	160	180	
	Flow (m³/h)														
3SPC5/180-D120/1500		4.9	4.6	4.5	4.3	4.0	3.6	3.2	2.8	2.4	1.9	1.6	0.5	0	

Pump Performance

Model	Voltage(Vdc)		Power		Max Head	Max Flow	Outlet	Solar Panel Configuration
	Rated	Range	Watt	HP	Mtrs.	m³/h	inch	
3SPC5/180-D120/1500	120	60-200	1500	2	180	5	1.25"	540W-36V-4PCS