

Himalaya G12 Series

700-730W

132-cell Bifacial HJT Half Cell
Double-glass Solar Module



HJT-0BB Technology

Shorter current transport path, better low-light performance, and higher power generation.



Sealing with PIB

Stronger moisture resistance, greater air impermeability to extent module lifespan.



Up to 95% bifaciality Rate

Natural symmetrical bifacial structure, with more energy yield from the rear.



Suitable for Utility Scenarios

Effectively reduce BOS costs and lower LCOE.



Complete System and Product Certifications:

IEC61215, IEC61730


ISO9001:2015 Quality Management System

ISO14001:2015 Environment Management System

ISO45001:2018 Occupational Health and Safety

IEC62941:2019 Terrestrial photovoltaic (PV) modules- Quality system for PV module manufacturing

IEC/TS62994: 2019 Photovoltaic (PV) Modules Through the Life Cycle-environmental Health and Safety (EH&S) Risk Assessment-general Principles and Nomenclature

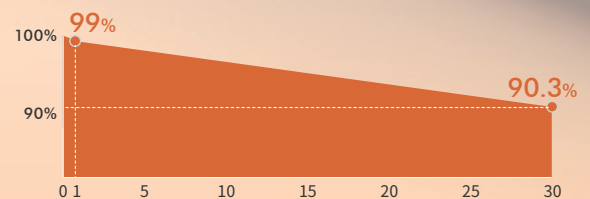

* First year power degradation $\leq 1\%$
 * Annual power degradation (2-30 year) $\leq 0.3\%$
 * Power output until the 30th year $\geq 90.3\%$


HSN-210-B132 700-730W

132-Half-Cell Bifacial HJT Module

- BloombergNEF Tier 1 PV module manufacturer
- Reinsurance underwritten by Ariel Re


Engineering Drawings

Unit: mm

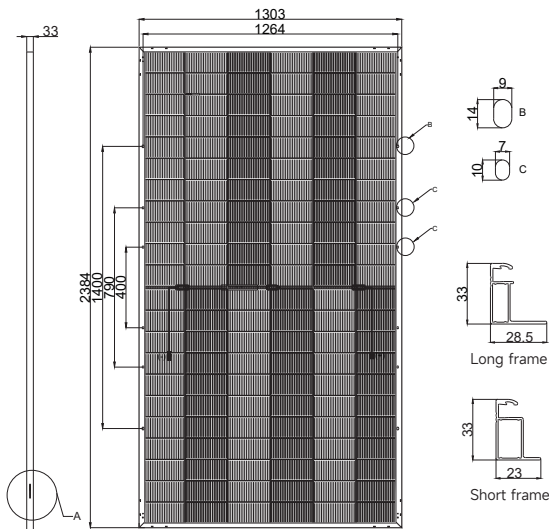

I-V Curve

(HSN-210-B132DS730)

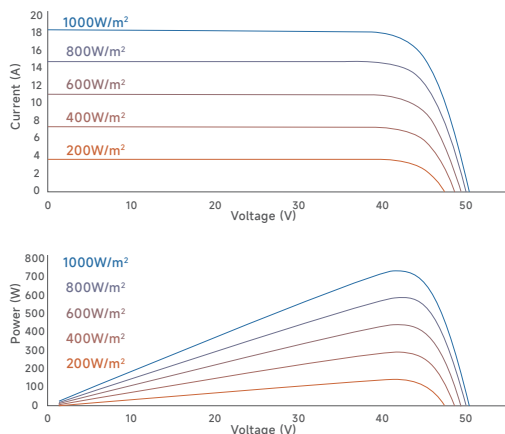

Temperature Characteristics

Temperature Coefficient of P _{max}	-0.24%/°C
Temperature Coefficient of V _{oc}	-0.22%/°C
Temperature Coefficient of I _{sc}	+0.04%/°C

Operating Conditions

Nominal Operating Cell Temp.	44±2°C
Operating Temperature	-40~+85°C
Maximum System Voltage	DC1500V (IEC)
Maximum Series Fuse Rating	35A
Tolerance of P _{max}	0~+3%
Power Selection	0~+5W
Bifaciality	90±5%
Safety Class	Class II

Mechanical Characteristics

Cell Type	HJT
No. of Cells	132 (6x22)
Dimensions	2384 x 1303 x 33 mm
Weight	36.5 kg
Junction Box	IP68
Cable	4mm²; +350/-250mm or customized; UV resistant
Connector	PV-H1 / MC4-Evo 2 / Others
Frame	Anodized aluminum alloy frame
Max Static Load (front side/rear side)	5400Pa / 2400Pa
Glass	Dual glass, 2.0mm

Electrical Characteristics

STC

HSN-210-B132	DS700	DS705	DS710	DS715	DS720	DS725	DS730
Maximum Power (P _{max} /W)	700	705	710	715	720	725	730
Module Efficiency (%)	22.5	22.7	22.9	23.0	23.2	23.3	23.5
Voltage at P _{max} (V _{mp} /V)	41.78	41.87	41.96	42.05	42.14	42.23	42.32
Current at P _{max} (I _{mp} /A)	16.76	16.84	16.93	17.02	17.10	17.18	17.26
Open Circuit Voltage (V _{oc} /V)	49.77	49.87	49.97	50.07	50.17	50.27	50.37
Short Circuit Current (I _{sc} /A)	17.81	17.90	17.99	18.08	18.17	18.26	18.35

STC: AM1.5, 1000W/m², 25°C.

BNPI

Maximum Power (P _{max} /W)	785	790	796	801	807	813	818
Voltage at P _{max} (V _{mp} /V)	41.92	42.02	42.11	42.20	42.29	42.38	42.47
Current at P _{max} (I _{mp} /A)	18.73	18.82	18.91	19.00	19.10	19.19	19.28
Open Circuit Voltage (V _{oc} /V)	49.94	50.04	50.14	50.24	50.34	50.44	50.54
Short Circuit Current (I _{sc} /A)	19.97	20.07	20.18	20.28	20.38	20.48	20.58

BNPI: AM1.5, 1000W/m², 135W/m², 25°C.

NOCT

Maximum Power (P _{max} /W)	534	538	542	545	549	553	557
Voltage at P _{max} (V _{mp} /V)	39.90	40.00	40.07	40.14	40.23	40.32	40.41
Current at P _{max} (I _{mp} /A)	13.39	13.46	13.53	13.60	13.67	13.73	13.79
Open Circuit Voltage (V _{oc} /V)	47.50	47.60	47.69	47.79	47.88	47.98	48.08
Short Circuit Current (I _{sc} /A)	14.23	14.31	14.38	14.45	14.52	14.59	14.67

NOCT: AM1.5, 800W/m², 20°C, 1m/s.

Packaging

	40'HQ
Modules Per Pallet	33
Pallets Per Container	18
Modules Per Container	594



ANHUI HUASUN ENERGY CO., LTD. All rights reserved © 2020-2025

NO.99 Qingliu Road, Economic and Technological Development Zone, Xuancheng, Anhui, China
Tel: 0086-563-3318095 www.huasunsolar.com
sales@huasunsolar.com customerservice@huasunsolar.com

With the development of technology and the iterative updating of products, the technical specification of products released by HUASUN in the future may differ from those listed in this datasheet. HUASUN reserves the right to change the technical specification of the products at any time without prior notice, and the technical specification of the products ordered by the customers are subject to the technical specification agreed upon in the legally binding contract signed by both parties. The final interpretation of the datasheet is reserved by HUASUN.

1.0_20250814_U